

Chain Couplings

Chain Coupling Data

Coupling Size	Chain Size	Bore		Casing O.D A	Casing Width B	Assembled Width C	Hub Length D	Hub Diameter E	Bolt Centres F	Torque Ratings Nm	Complete Weight kg
		Min	Max								
3512	35-2	12	15	70	62	65	28	25	57	150	0.5
4012	40-2	12	20	78	72	78	36	31	61	210	1.0
4014	40-2	12	25	85	75	80	36	43	72	300	1.4
4016	40-2	14	30	92	75	80	36	50	77	380	1.8
5014	50-2	14	35	101	84	100	45	53	82	550	2.5
5016	50-2	16	40	111	85	100	45	60	92	725	3.2
5018	50-2	16	45	123	85	100	45	70	106	925	4.0
6018	60-2	20	55	144	106	122	54	85	122	1750	7.2
6020	60-2	20	70	160	108	123	54	98	132	2050	9.5
6022	60-2	25	75	168	116	123	54	110	145	2400	11.3
8018	80-2	30	75	190	128	140	67	110	160	3800	14.7
8020	80-2	30	85	211	138	144	67	120	184	4700	18.2
8022	80-2	35	95	226	138	155	67	140	196	5500	23.3
10020	100-2	40	110	280	152	176	91	160	250	8700	36.0
12018	120-2	40	120	305	180	196	119	170	280	13250	49.0
12022	120-2	40	150	355	180	220	119	210	335	17800	77.0

Chain Coupling Selection


In general, the torque capacity of the coupling exceeds the normal torque transmitted by the largest shaft size that the coupling can accommodate.

Therefore, select the smallest coupling which accommodates both shaft diameters.

Where there is reverse operation, shock loads, or any other severe operating condition, it is recommended that the next coupling size up is selected.

Operation

In order to ensure that the maximum service life of the coupling is achieved, the cover together with the supplied 'O' rings should always be used. This is even more important when the drive is operating at high speeds or in a moist environment. The space between the cover and chain, should be filled with a soft to medium consistency grease.

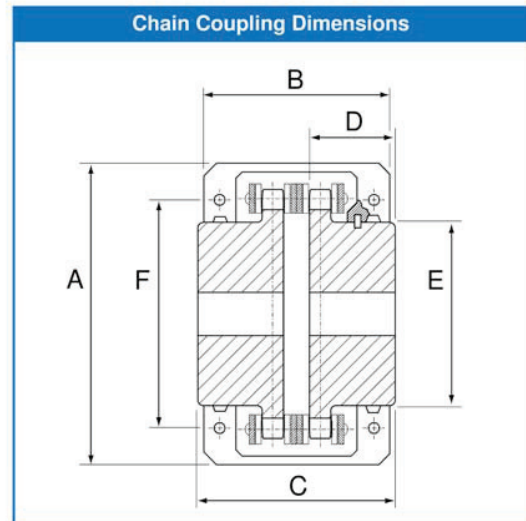

Power Transmission Ltd

Unit 18, Whitemoor Court Industrial Estate, Nuthall Road, Nottingham, NG8 5BY
 Tel: +44 (0) 115 929 0001 / Fax: +44 (0) 115 929 0008 / Email: sales@pte-ltd.co.uk
 Registered in England & Wales - Reg No: 6533509. Vat No: 973280796.